

ORLACO - DYNAMIC-/ MAST CABLE

ORL0301731

Cable 15m 4P Molded Connector

- Soft surface with a small bend radius
- M16 4-pole cast contacts or M16 7-pole cast contacts
- -40 to +85 °C




Product description

Suitable for use in moving applications, for example, for a gear camera mounted on an arm, a excavator boom or on a truck with a tipping platform. Works well in the mast on your truck.


Specifications

Cable Diameter	9
Cable length	15000
IP Class	IP67
Temperature range from	-40
Temperature range to	85



Electrical connection



1 = coax core	Video
2 = coax shielding	Video GND
3 = red	12...30V/DC
4 = black	0V
Orange	N.C.
Yellow	N.C.
Grey	N.C.




Electrical connection


Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

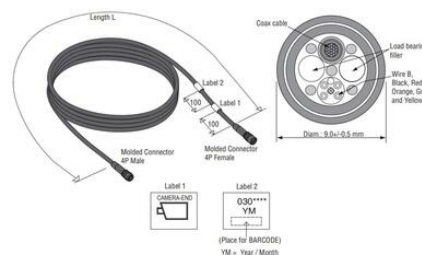



Units in mm

Label 2
030***0
YM

Label 1
Camera End