

# KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX 5868/5888, OPTICAL, PROFIBUS, Ø58 MM

SERIE 5868 PROFIBUS

- Housing diameter Ø58 mm
- Profibus
- High shock resistance
- High enclosure class



## Product description

Sendix 5868/5888 is a multivariate fieldbus sensor with Profibus in robust design. Thanks to the construction of Safety-Lock™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix 5868/5888 has LED indication which facilitates diagnosis of the sensor and a set button that facilitates calibration.

Please refer to the images below for ordering information.

Order code		8.5868 . XX3X . 311X	
Shaft version		Type	
<b>a</b> Flange	<b>c</b> Interface / power supply	<b>b</b> Fieldbus profile	
<b>1</b> = clamping flange, IP65 ø 58 mm [2.28"] 3 = clamping flange, IP67 ø 58 mm [2.28"] <b>2</b> = synchro flange, IP65 ø 58 mm [2.28"] 4 = synchro flange, IP67 ø 58 mm [2.28"] 5 = square flange, IP65 □ 63.5 mm [2.5"] 7 = square flange, IP67 □ 63.5 mm [2.5"]	<b>3</b> = PROFIBUS DP V0 encoder profile V 1.1, 10 ... 30 V DC  <b>d</b> Type of connection, removable bus terminal cover 1 = with radial cable gland fitting <b>2</b> = with 3 x radial M12 connectors	<b>31</b> = PROFIBUS DP V0 encoder profile class 2  <b>f</b> Options (service) 2 = no option <b>3</b> = SET button	
<b>b</b> Shaft (ø x L), with flat	Optional on request		
<b>1</b> = 6 x 10 mm [0.24 x 0.39"] <sup>1)</sup> <b>2</b> = 10 x 20 mm [0.39 x 0.79"] <sup>2)</sup> 3 = 1/4" x 7/8" 4 = 3/8" x 7/8"	- Ex 2/22 - surface protection salt spray tested - seawater resistant (stainless steel V4A)		
	Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)		
	salt spray tested: 8.5868.3232.3112-C		stainless steel V4A: 8.5868.3232.3112-V4A

**Order code**  
**Hollow shaft**

**8.5888**  
Type

**. X X 3 X . 31 1 X**  
a b c d e f

**a Flange**

- 1 = with spring element, long, IP65
- 2 = with spring element, long, IP67
- 3 = with stator coupling, IP65 ø 65 mm [2.56"]
- 4 = with stator coupling, IP67 ø 65 mm [2.56"]
- 5 = with stator coupling, IP65 ø 63 mm [2.48"]**
- 6 = with stator coupling, IP67 ø 63 mm [2.48"]

**b Blind hollow shaft**

- (insertion depth max. 30 mm [1.18"])
- 3 = ø 10 mm [0.39"]
  - 4 = ø 12 mm [0.47"]**
  - 5 = ø 14 mm [0.55"]
  - 6 = ø 15 mm [0.59"]
  - 8 = ø 3/8"
  - 9 = ø 1/2"

**c Interface / power supply**

**3 = PROFIBUS DP V0 encoder profile V 1.1, 10 ... 30 V DC**

**d Type of connection, removable bus terminal cover**

- 1 = with radial cable gland fitting
- 2 = with 3 x radial M12 connectors**

**e Fieldbus profile**

**31 = PROFIBUS DP V0 encoder profile class 2**

**f Options (service)**

- 2 = no option
- 3 = SET button**

*Optional on request*

- Ex 2/22
- surface protection salt spray tested
- seawater resistant (stainless steel V4A)

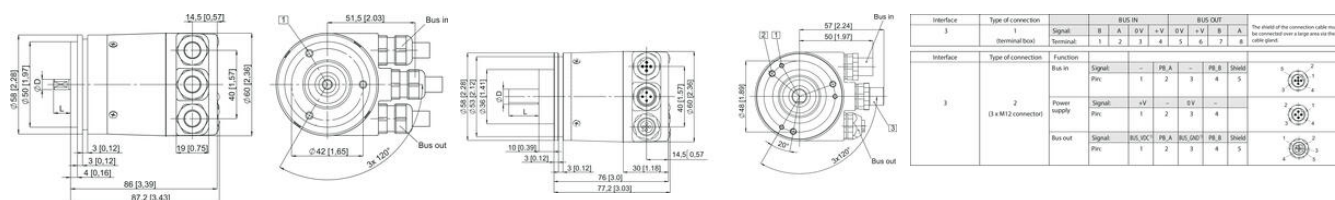
*Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)*



 salt spray tested:  
8.5888.2432.3112-C  
8.5888.2532.3112-C

 **V4A** stainless steel V4A:  
8.5888.2432.3112-V4A  
1.4404

**Specifications**

<b>Housing diameter</b>	58
<b>IP Class</b>	IP65, IP67
<b>Resolution Envarv</b>	16 bit (default: 13 bit)
<b>Resolution More Yards</b>	12 bit
<b>Resolution Overall</b>	Max. 28 bit (default 25 bit)
<b>Shaft Diameter max</b>	10
<b>Shaft Diameter min</b>	6
<b>Supply Voltage DC Max</b>	30
<b>Supply Voltage DC Min</b>	10
<b>Temperature range from</b>	-40
<b>Temperature range to</b>	80



Interface	Type of connection	Function	BUS IN	BUS OUT	The shield of the connection cable must be connected over its entire length to the cable gland	
3	1 (terminal box)	Signal	B A +V -V	+V B A		
		Terminal	1 2 3 4 5	6 7 8		
3	2 (3 x M12 connector)	Bus in	- - PB A - - PB B	Shield		
		Signal	1 2 3 4 5	6		
		Power supply	+V -V	-		7
		Bus out	Signal	B0, 0C1 PB A, B0, 0A0 PB B, Shield		8