

**KUEBLER - ABSOLUTE-CODED
ANGULAR TRANSMITTER SENDIX M3663
/ M3683, MAGNETIC, SSI, Ø36 MM**
SERIE M3663

- Housing diameter Ø36 mm
- SSI - interface
- New multicolor technology
- IP67



Product description

Sendix M3663 / M3683 is a magnetically encoded absolute encoder with the latest in multicore technology with "Energy Harvesting". Energy Harvesting technology is based on magnetic recharging, eliminating both battery and gear.

With its magnetic coding, the pulse sensor becomes more shockproof and insensitive. The high IP rating allows the Sendix M3663 / M3683 for outdoor environments and mobile applications.

Please refer to the images below for ordering information.

Order code	8.M3663.XX2X.XXX2																															
Shaft version	Type	a	b	c	d	e	f	g																								
a Flange		1 = clamping flange, IP67, ø 36 mm [1.42"]	3 = clamping flange, IP65, ø 36 mm [1.42"]	2 = synchro flange, IP67, ø 36 mm [1.42"]	4 = synchro flange, IP65, ø 36 mm [1.42"]	b Shaft (ø x L), with flat	1 = ø 6 x 12.5 mm [0.24 x 0.49"]	3 = ø 8 x 15 mm [0.32 x 0.59"]	5 = ø 10 x 20 mm [0.39 x 0.79"]	2 = ø 1/4" x 12.5 mm [0.49"]	c Interface / power supply	2 = SSI / 10 ... 30 V DC	d Type of connection	1 = axial cable, 1 m [3.28'] PUR	A = axial cable, special length PUR *)	2 = radial cable, 1 m [3.28'] PUR	B = radial cable, special length PUR *)	3 = axial M12 connector, 8-pin	4 = radial M12 connector, 8-pin	e Code	B = SSI, binary	G = SSI, gray	f Resolution (singleturn)	A = 10 bit ST	2 = 12 bit ST	3 = 13 bit ST	4 = 14 bit ST					
												*) Available special lengths (connection types A, B): 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.M3663.432A.G322.0030 (for cable length 3 m)						g Resolution (multiturn)														
																								Optional on request			- Ex 2/22 (only for connection types 3 and 4)			- surface protection salt spray tested		

Order code
Hollow shaft

8.M3683.XX2X.XXX2
Type

a Flange

- 2 = with stator coupling, IP65, ø 46 mm [1.81"]**
- 3 = with spring element, long, IP65
- 5 = with stator coupling, IP67, ø 46 mm [1.81"]
- 6 = with spring element, long, IP67

b Blind hollow shaft

- (insertion depth max. 18.5 mm [0.73"])
- 1 = ø 6 mm [0.24"]
- 3 = ø 8 mm [0.32"]
- 4 = ø 10 mm [0.39"]**
- 2 = ø 1/4"

c Interface / power supply

- 2 = SSI / 10 ... 30 V DC**

d Type of connection

- 1 = axial cable, 1 m [3.28'] PUR
 - A = axial cable, special length PUR *)
 - 2 = radial cable, 1 m [3.28'] PUR
 - B = radial cable, special length PUR *)
 - 3 = axial M12 connector, 8-pin
 - 4 = radial M12 connector, 8-pin**
- *) Available special lengths (connection types A, B):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.M3683.242A.G322.0030 (for cable length 3 m)

e Code

- B = SSI, binary
- G = SSI, gray**

f Resolution (singleturn)

- A = 10 bit ST
- 2 = 12 bit ST
- 3 = 13 bit ST**
- 4 = 14 bit ST

g Resolution (multiturn)


- 2 = 12 bit MT**
- 6 = 16 bit MT
- A = 20 bit MT
- 4 = 24 bit MT

Optional on request

- Ex 2/22 (only for connection types 3 and 4)
- surface protection salt spray tested

Specifications

Housing diameter	36
IP Class	IP65, IP67
Resolution Envarv	10-14 bit
Resolution More Yards	Max. 24 bit
Shaft Diameter max	10
Shaft Diameter min	6
Supply Voltage DC Max	30
Supply Voltage DC Min	10
Temperature range from	-40
Temperature range to	85

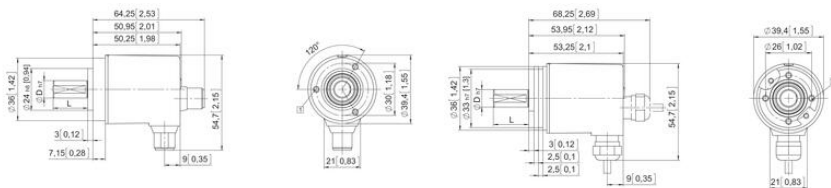

Interface	Type of connection	Features	Cable (cable unused wires individually before initial start-up)
2	1, 2, A, B	SET, DIR	Signal: ØV, +V, C+, C-, D+, D-, SET, DIR, H Cable colour: WH, BN, GN, YE, GY, PK, BU, RD, shield
2	3, 4	SET, DIR	M12 connector, 8-pin Signal: ØV, +V, C+, C-, D+, D-, SET, DIR, H Pin: 1, 2, 3, 4, 5, 6, 7, 8, PH

+V Encoder power supply +V DC
ØV Encoder power supply ground GND (ØV)
C+, C- Clock signal
D+, D- Data signal
SET Set input. The current position becomes defined as position zero.
DIR Direction input: if this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.
PHH Plug connector housing shield

Top view of mating side. Male contact base

