

**KUEBLER - ABSOLUTE-CODED  
ANGULAR TRANSMITTER SENDIX  
3651/3671, MAGNET-CODED, ANALOG,  
Ø36 MM  
SERIE 3651**

- Housing diameter Ø36 mm
- analog Output
- High shock resistance
- Degree of protection IP67 / IP69K



**Product description**

Sendix 3651/3671 is a series of single-wave magnet-coded absolute transducers that are available in both shaft and hole axes with analog interface. Thanks to the contactless technology, the sensor is very compact and robust. As this technology allows for complete encapsulation of the sensor part on the sensor, a high enclosure class (IP69K on request), shock resistance and a wide temperature range can be achieved. The sensor is therefore very suitable for applications where extreme environments or temperatures can occur, such as mobile applications. It comes with either M12 or PUR cable as standard. Sendix 3651/3671 is also available in a salt water resistant version.

Please refer to the images below for ordering information.

Order code	8.3651 . 2XXXX . XXXX	
Shaft version	Type	
<b>a</b> Flange	<b>b</b> Shaft (ø x L), with flat	<b>d</b> Type of connection
<b>2</b> = synchro flange, ø 36 mm [1.42"]	<b>3</b> = ø 6 x 12.5 mm [0.24 x 0.49"] 6 = ø 8 x 12.5 mm [0.32 x 0.49"] 5 = ø 1/4" x 12.5 mm [0.49"]	1 = axial cable, 1 m [3.28'] PUR A = axial cable, special length PUR *) <b>2</b> = radial cable, 1 m [3.28'] PUR B = radial cable, special length PUR *) 3 = axial M12 connector, 5-pin 4 = radial M12 connector, 5-pin
<b>c</b> Output circuit <sup>1)</sup>		<b>f</b> Interface / power supply
<b>3</b> = current output <b>4</b> = voltage output		<b>3</b> = 4 ... 20 mA / 10 ... 30 V DC <b>4</b> = 0 ... 10 V / 15 ... 30 V DC 5 = 0 ... 5 V / 10 ... 30 V DC
		<b>g</b> Option 1
		<b>1</b> = count direction cw <sup>2)</sup> 2 = count direction ccw <sup>3)</sup>
		<b>h</b> Option 2
		<b>1</b> = IP67 2 = IP69k
		<i>Optional on request</i>
		- Ex 2/22 (only for type of connection 3 + 4) - surface protection salt spray tested
	<b>e</b> Measuring range	
	<b>1</b> = 1 x 360° 2 = 1 x 180° 3 = 1 x 90° 4 = 1 x 45°	

**Order code**  
**Hollow shaft**

**8.3671**  
Type

. **XXXXX** . **XXXXX**  
**a b c d e f g h**

**a Flange**  
2 = with spring element, long  
5 = with stator coupling, ø 46 mm [1.81"]

**b Blind hollow shaft**  
(insertion depth max. 18 mm [0.71"])  
2 = ø 6 mm [0.24"]  
4 = ø 8 mm [0.32"]  
6 = ø 10 mm [0.39"]  
3 = ø 1/4"

**c Output circuit<sup>1)</sup>**  
3 = current output  
4 = voltage output

**d Type of connection**  
1 = axial cable, 1 m [3.28'] PUR  
A = axial cable, special length PUR \*)  
2 = radial cable, 1 m [3.28'] PUR  
B = radial cable, special length PUR \*)  
3 = axial M12 connector, 5-pin  
4 = radial M12 connector, 5-pin  
\*) Available special lengths (connection types A, B):  
2, 3, 5, 8, 10, 15 m [6.56, 9.84, 16.40, 26.25, 32.80, 49.21']  
order code expansion .XXXX = length in dm  
ex.: 8.3671.523A.1311.0030 (for cable length 3 m)

**e Measuring range**  
1 = 1 x 360°  
2 = 1 x 180°  
3 = 1 x 90°  
4 = 1 x 45°

**f Interface / power supply**  
3 = 4 ... 20 mA / 10 ... 30 V DC  
4 = 0 ... 10 V / 15 ... 30 V DC  
5 = 0 ... 5 V / 10 ... 30 V DC



**g Option 1**  
1 = count direction cw<sup>2)</sup>  
2 = count direction ccw<sup>3)</sup>


**h Option 2**  
1 = IP67  
2 = IP69k

*Optional on request*  
- Ex 2/22 (only for type of connection 3 + 4)  
- surface protection salt spray tested




**Specifications**

<b>Connection Thread</b>	Cable, M12
<b>Housing diameter</b>	36
<b>IP Class</b>	IP67, IP69K
<b>Mounting</b>	Shoulder
<b>Output</b>	Analog
<b>Sensor type</b>	Absolute
<b>Shaft Diameter max</b>	8
<b>Shaft Diameter min</b>	6
<b>Supply Voltage DC Max</b>	30
<b>Supply Voltage DC Min</b>	10
<b>Temperature range from</b>	-40
<b>Temperature range to</b>	85
<b>Version</b>	Singleturn

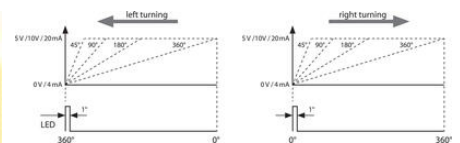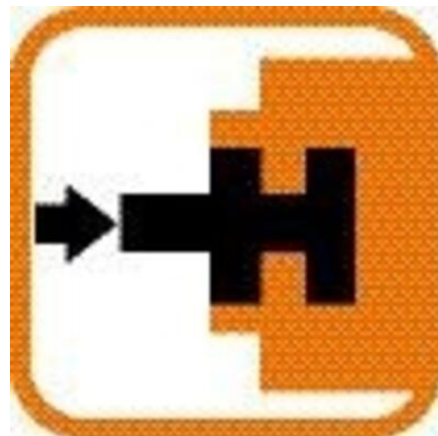

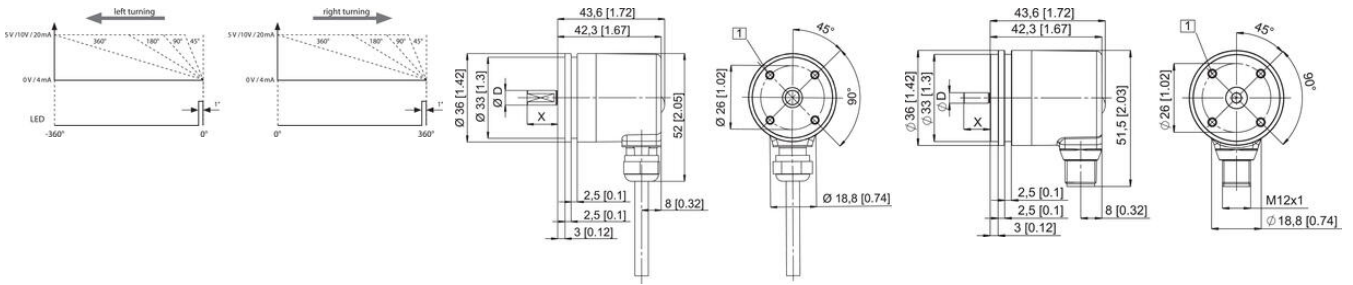

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)				
3 (turning)	1, 2, A, B	Signal	0V	+V	+I	-I
		Cable colour:	WH	BN	GN	YE
Interface	Type of connection	M12 connector, 5 pin				
3 (turning)	3, 4	Signal	0V	+V	+I	-I
		Pin:	3	2	4	5
Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)				
4, 5 (rotating)	1, 2, A, B	Signal	0V	+V	+U	-U
		Cable colour:	WH	BN	GN	YE
Interface	Type of connection	M12 connector, 5 pin				
4, 5 (rotating)	3, 4	Signal	0V	+V	+U	-U
		Pin:	3	2	4	5

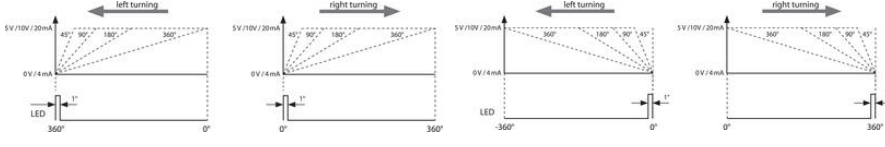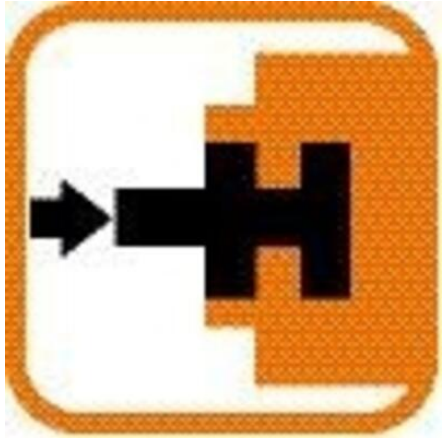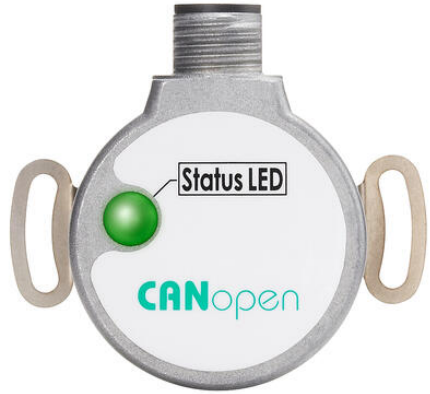

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)				
3 (turning)	1, 2, A, B	Signal	0V	+V	+I	-I
		Cable colour:	WH	BN	GN	YE
Interface	Type of connection	M12 connector, 5 pin				
3 (turning)	3, 4	Signal	0V	+V	+I	-I
		Pin:	3	2	4	5
Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)				
4, 5 (rotating)	1, 2, A, B	Signal	0V	+V	+U	-U
		Cable colour:	WH	BN	GN	YE
Interface	Type of connection	M12 connector, 5 pin				
4, 5 (rotating)	3, 4	Signal	0V	+V	+U	-U
		Pin:	3	2	4	5



0V: Encoder power supply +V DC  
 0V: Encoder power supply ground (GND) (0V)  
 +I / -I: Voltage + / voltage -  
 +I / -I: Current + / current -