

DATALOGIC - S7 - FIBRE OPTIC AMPLIFIER

S7-1-E-P

950551090 Fibre Amplifier PNP White LED

- The first fibre amplifier produced in Europe
- Small size - only 10 mm wide
- Down to 50µs response time
- Easy to use





Product description

The S7 high resolution amplifiers are suggested for the detection of small objects through the use of a fibre optic cable. They are best used in confined spaces or hard to reach applications. They can also be used in presence of high temperature, with the sensor mounted inside the application and the amp outside.

Specifications

Approvals	CE, UL
Cable length	2000
Dimension (mm)	10 x 65 x 40
IP Class	IP65
Output current max	0,1
Power consumption max	0,05
Reaction time	0,05
Sensitivity Setting	Teach in/Remote via cable
Supply voltage	12-24 V DC
Temperature range bearing, from	-25
Temperature range bearing, to	70
Temperature range from	-10
Temperature range to	55

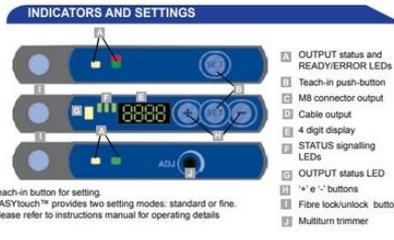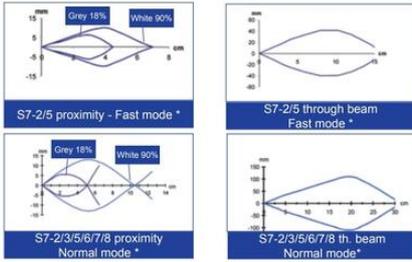

Teach-in button for setting.
EASYtouch™ provides two setting modes: standard or fine.
Please refer to instructions manual for operating details

