


## EARTH TERMINALS - SNAP ON - SSL 2.5-35 MM<sup>2</sup>

### SSL

17103.2  
Terminal block SSL 2.5sq Earth

- Snap on construction
- Secure fixings on both sides of the rail
- Can be cross connected
- Material polyamide 6.6- UL94-V0
- emperature resistance -40 °C...+120 °C

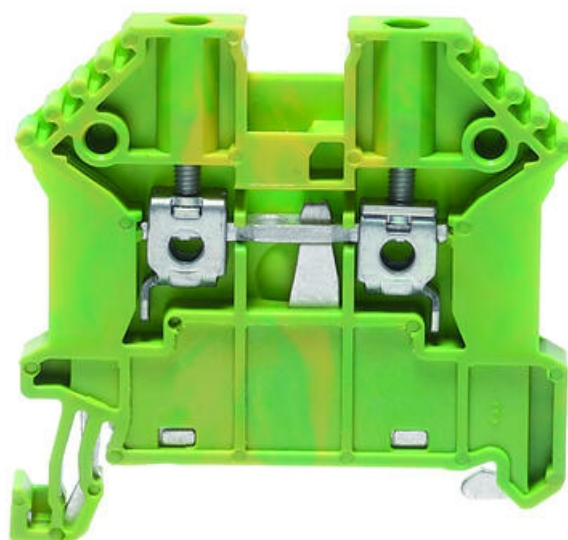

#### Product description

#### Specifications

<b>Approvals</b>	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
<b>Connections</b>	2
<b>Contamination degree</b>	3
<b>Country of origin</b>	DE
<b>Cross connect channels</b>	1
<b>Cross section single wire from</b>	0,2
<b>Cross section single wire to</b>	4
<b>Cross section stranded wire from</b>	0,2
<b>Cross section stranded wire to</b>	4
<b>Cross section stranded with ferrule from</b>	0,2
<b>Cross section stranded with ferrule to</b>	2,5
<b>Cross-Section</b>	2,5
<b>CSA test standard</b>	C22.2 No 158
<b>CSAus test standard</b>	UL 1059
<b>cUL test standard</b>	C22.2 No 158
<b>EAC test standard</b>	TR ZU 004/2011
<b>Flammability class</b>	UL94-V0

<b>GL test standard</b>	IEC 60947-7-2:2009
<b>Height TS 35/7.5</b>	47
<b>KEMA KEUR test standard</b>	EN 60947-7-2:2009
<b>Length</b>	48
<b>Number of levels</b>	1
<b>Number of test pick off options</b>	1
<b>Operating temperature from</b>	-40
<b>Operating temperature to</b>	120
<b>Overvoltage category</b>	III
<b>Pack Size</b>	100
<b>Plug gauge acc. EN 60 947-1</b>	A3
<b>Rated wire cross section from (AWG)</b>	30
<b>Rated wire cross section to (AWG)</b>	12
<b>Screw size</b>	M 2,5
<b>Stripping Length</b>	10
<b>Tariff code</b>	85369010
<b>Torque max</b>	0,8
<b>Torque Min</b>	0,4
<b>UL test standard</b>	UL 1059
<b>Weight</b>	11,51
<b>Width</b>	5

