


## CROSS CONNECTORS FOR RK, IK, DLI & SK RANGE

Q, QI

2567.0

Terminal Link Bar Q2 RK2.5/RKD2.5sq, 2 Way

- Screw in
- Insulated versions
- Can be cut down

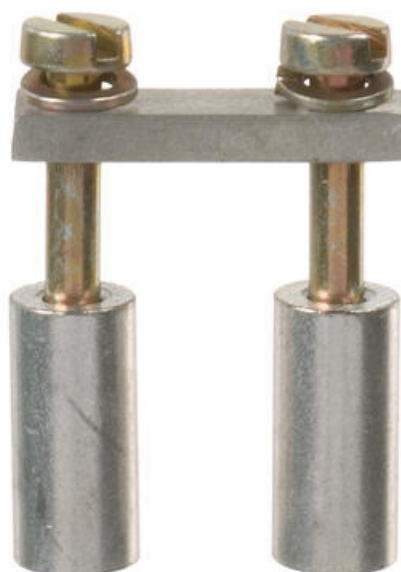

### Product description

The Q/QI screwable cross-connector system allows you to quickly link terminal blocks of the same size. The QI range is touch-safe and are generally available in 2, 3, 4 or 10 poles, some variants have up to 98 poles, which can be cut down as required. With both ranges it is possible to 'skip' over terminals by breaking out the conductor (QI) or removing the screw and sleeve (Q).

### Specifications

|                                      |   |
|--------------------------------------|---|
| <b>Additional information</b>        | for RK 2,5   KBL 2,5   RKD 2,5   KBLD 2,5 |
| <b>Contamination degree</b>          | 3   |
| <b>Country of origin</b>             | DE  |
| <b>Cross-Section</b>                 | 2,5                                       |
| <b>Diameter Of Hole</b>              | 2,8                                       |
| <b>Distance to hole centres</b>      | 5,1                                       |
| <b>Length</b>                        | 4   |
| <b>Max voltage with partition</b>    | 800                                       |
| <b>Max voltage without partition</b> | 400                                       |
| <b>Number of poles</b>               | 2   |
| <b>Pack Size</b>                     | 50  |
| <b>Pitch</b>                         | 5   |
| <b>Rated Current IEC</b>             | 20  |
| <b>Screw size</b>                    | M 2,5                                     |

|                    |          |
|--------------------|----------|
| <b>Tariff code</b> | 85369010 |
| <b>Torque max</b>  | 0,8      |
| <b>Torque Min</b>  | 0,4      |
| <b>Weight</b>      | 2,2      |
| <b>Width</b>       | 9,1      |