


## DISCONNECT TERMINALS - TRK, STK/K

TK, STK/K, STKD/K

1390.2

Terminal Block TRK2.5sq Knife Disconnect Beige

- Material polyamide 6.6
- Temperature resistance -40 °C...+105 °C
- Flammability class V2
- Removable plug option
- Fuse solid links

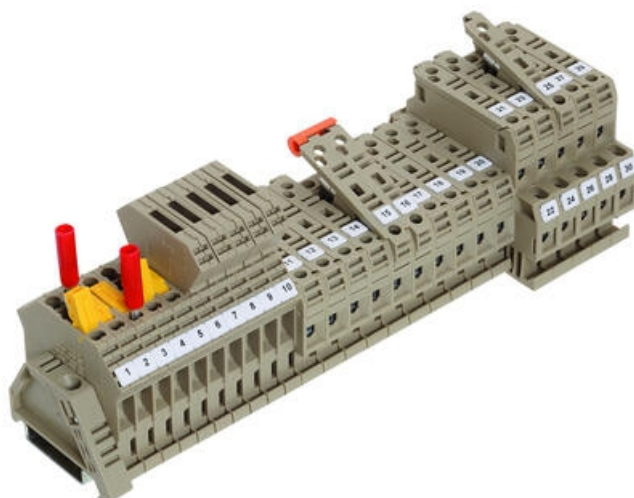

### Product description

Features of the TRK 1.5/TRK 1.5 DS Same construction as the standard terminal blocks A sturdy, closed insulation housing The established disconnect-blade with high-quality surfaces Minimal and stable level of contact resistance Touch-safe protection also during the disconnect There are 4 -types of DS plugs Disconnect without circuitry Disconnect plug with wire jumper Disconnect plug with blocking diode Disconnect plug with pass through diode STB Versions offers the advantage of a 4mm test socket for pick-off. TK & STK/K versions are low profile and come with a hinged lever for disconnecting and a contact sleeve. Features of the TK and STK../K Same construction as the standard terminal fuse blocks Hinged lever latches into fully open position. Disconnect terminals can be used as fuse-disconnect terminals by changing the sleeve (KH5 and KH6.3) to a fuse STKD1/K includes a feed through connection

### Specifications

<b>Additional information</b>	with disconnect knife
<b>Approvals</b>	UL, cUL, KEMA KUR, NEMKO
<b>Connections</b>	2
<b>Contamination degree</b>	3
<b>Country of origin</b>	CZ
<b>Cross section single wire from</b>	0,2
<b>Cross section single wire to</b>	4
<b>Cross section stranded wire from</b>	0,2
<b>Cross section stranded wire to</b>	4
<b>Cross section stranded with ferrule from</b>	0,2
<b>Cross section stranded with ferrule to</b>	2,5
<b>Cross-Section</b>	2,5
<b>cUL test standard</b>	C22.2 No 158
<b>Flammability class</b>	UL94-V2

Height TS 32	52,8
Height TS 35/7.5	48,3
KEMA KEUR test standard	EN 60947-7-1:2009
Length	48
Nemko test standard	EN 60947-7-1:2005
Number of levels	1
Operating temperature from	-40
Operating temperature to	105
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A4
Rated current cUL	15
Rated Current IEC	10
Rated Current To UL	15
Rated impulse voltage	4
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Rated voltage cUL	600
Rated Voltage IEC	400
Rated Voltage To UL	600
Screw size	M 3
Stripping Length	8
Tariff code	85369010
Torque max	1
Torque Min	0,5
UL test standard	UL 1059
Weight	10,73
Width	6

