


## DISCONNECT TERMINALS - TRK, STK/K

TK, STK/K, STKD/K

1390.2

Terminal Block TRK2.5sq Knife Disconnect Beige

- Material polyamide 6.6
- Temperature resistance -40 °C...+105 °C
- Flammability class V2
- Removable plug option
- Fuse solid links

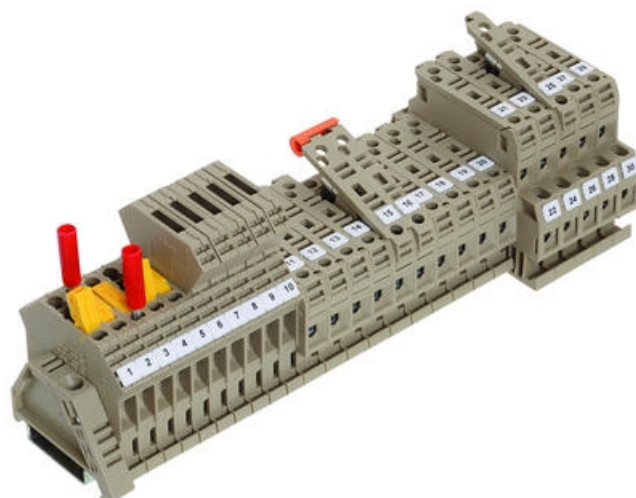

### Product description

Features of the TRK 1.5/TRK 1.5 DS Same construction as the standard terminal blocks A sturdy, closed insulation housing The established disconnect-blade with high-quality surfaces Minimal and stable level of contact resistance Touch-safe protection also during the disconnect There are 4 -types of DS plugs Disconnect without circuitry Disconnect plug with wire jumper Disconnect plug with blocking diode Disconnect plug with pass through diode STB Versions offers the advantage of a 4mm test socket for pick-off. TK & STK/K versions are low profile and come with a hinged lever for disconnecting and a contact sleeve. Features of the TK and STK../K Same construction as the standard terminal fuse blocks Hinged lever latches into fully open position. Disconnect terminals can be used as fuse-disconnect terminals by changing the sleeve (KH5 and KH6.3) to a fuse STKD1/K includes a feed through connection

### Specifications

|   |                          |
|---|--------------------------|
| <b>Additional information</b>                   | with disconnect knife    |
| <b>Approvals</b>                                | UL, cUL, KEMA KUR, NEMKO |
| <b>Connections</b>                              | 2                        |
| <b>Contamination degree</b>                     | 3                        |
| <b>Country of origin</b>                        | CZ                       |
| <b>Cross section single wire from</b>           | 0,2                      |
| <b>Cross section single wire to</b>             | 4                        |
| <b>Cross section stranded wire from</b>         | 0,2                      |
| <b>Cross section stranded wire to</b>           | 4                        |
| <b>Cross section stranded with ferrule from</b> | 0,2                      |
| <b>Cross section stranded with ferrule to</b>   | 2,5                      |
| <b>Cross-Section</b>                            | 2,5                      |
| <b>cUL test standard</b>                        | C22.2 No 158             |
| <b>Flammability class</b>                       | UL94-V2                  |

|                                     |                   |
|-------------------------------------|-------------------|
| Height TS 32                        | 52,8              |
| Height TS 35/7.5                    | 48,3              |
| KEMA KEUR test standard             | EN 60947-7-1:2009 |
| Length                              | 48                |
| Nemko test standard                 | EN 60947-7-1:2005 |
| Number of levels                    | 1                 |
| Operating temperature from          | -40               |
| Operating temperature to            | 105               |
| Overvoltage category                | III               |
| Pack Size                           | 100               |
| Plug gauge acc. EN 60 947-1         | A4                |
| Rated current cUL                   | 15                |
| Rated Current IEC                   | 10                |
| Rated Current To UL                 | 15                |
| Rated impulse voltage               | 4                 |
| Rated wire cross section from (AWG) | 22                |
| Rated wire cross section to (AWG)   | 12                |
| Rated voltage cUL                   | 600               |
| Rated Voltage IEC                   | 400               |
| Rated Voltage To UL                 | 600               |
| Screw size                          | M 3               |
| Stripping Length                    | 8                 |
| Tariff code                         | 85369010          |
| Torque max                          | 1                 |
| Torque Min                          | 0,5               |
| UL test standard                    | UL 1059           |
| Weight                              | 10,73             |
| Width                               | 6                 |

