


## MINIATURE TERMINALS TS15/32/35 - RK 1.5-4, SRK 2.5

RK1.5-4, SRK 2.5

1010.2

Terminal Block Mini RK 1.5-4sq Beige (TS15)

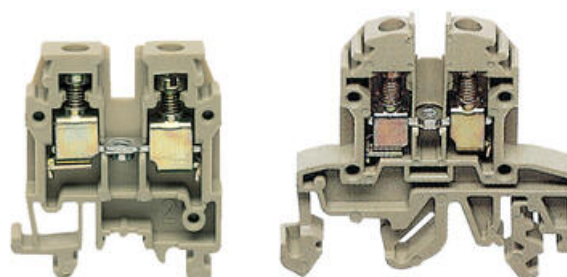

- Compact - ideal for small enclosures
- TS15/TS32 & TS35 range
- up to 4mm<sup>2</sup> cables
- cross connectable
- Polymide 6.6-V2

### Product description

This mixed range of compact terminals is ideal for applications where space is at a premium. The SRK2.5/15 range is the most compact, sitting only 29.5mm high when mounted on TS15 rail. Alternatively, if you do not want din rail mounted terminals, the BKA rang are also compact, but can be mounted directly in the enclosure or back plate.

### Specifications

<b>Approvals</b>	UL, CSA, GL, KEMA KUR, EAC
<b>Color</b>	Beige
<b>Connections</b>	2
<b>Contamination degree</b>	3
<b>Country of origin</b>	CZ
<b>Cross connect channels</b>	1
<b>Cross section single wire from</b>	0,2
<b>Cross section single wire to</b>	4
<b>Cross section stranded wire from</b>	0,2
<b>Cross section stranded wire to</b>	4
<b>Cross section stranded with ferrule from</b>	0,2
<b>Cross section stranded with ferrule to</b>	4
<b>Cross-Section</b>	4
<b>CSA test standard</b>	C22.2 No 158
<b>EAC test standard</b>	TR ZU 004/2011
<b>Flamklass</b>	UL94-V2
<b>GL test standard</b>	IEC 60947-7-1:2002

<b>Height TS 15/5.5</b>	34,5
<b>Insulation Material</b>	Polyamide 6.6
<b>KEMA KEUR test standard</b>	EN 60947-7-1:2009
<b>Length</b>	27
<b>Mounting</b>	TS 15
<b>Number of levels</b>	1
<b>Number of test pick off options</b>	2
<b>Operating temperature from</b>	-40
<b>Operating temperature to</b>	105
<b>Overvoltage category</b>	III
<b>Pack Size</b>	100
<b>Plug gauge acc. EN 60 947-1</b>	A4
<b>Rated Current CSA</b>	40
<b>Rated Current IEC</b>	32
<b>Rated impulse voltage</b>	6
<b>Rated wire cross section from (AWG)</b>	22
<b>Rated wire cross section to (AWG)</b>	10
<b>Rated Voltage IEC</b>	500
<b>Screw size</b>	M 3
<b>Screw type</b>	Slotted
<b>Stripping Length</b>	9
<b>Tariff code</b>	85369010
<b>Torque max</b>	1
<b>Torque Min</b>	0,5
<b>UL test standard</b>	UL 1059
<b>Weight</b>	5,64
<b>Width</b>	6
<b>Voltage CSA</b>	300

