


## KUBLER SLIP RING SR085

SR085-25-040411301

SLIP RING 4 SIGNAL / 4 POWER 25MM SHAFT

- Modular system
- Speed max. 800 rpm
- Lifespan 500 million revolutions
- Two-chamber system

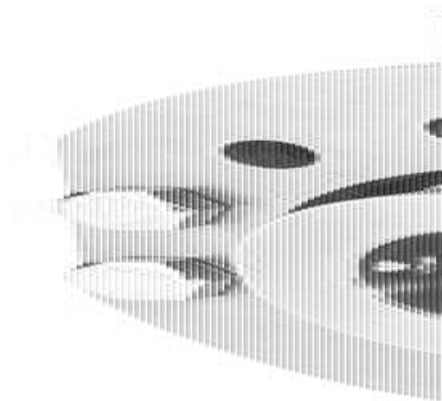

### Product description


SR085 has a strong design for industrial use. The construction is modular, where load and data signals can be combined individually. The load and data signals take place in physically separated chambers, which guarantees safe operation. The house is built in strong fiberglass-reinforced polycarbonate.

The transmission of load and signal takes place through trailer contacts with double contact surfaces, which are adapted for load or signal. The trailer contacts are asymmetrical to ensure that at least one always has contact, even in the event of vibrations. The load transfer takes place via trailer contacts of copper graphite for high wear resistance. The data transfer trailer connectors are made of copper alloy (gold-plated as an option for low signal voltages). Signal transmission can also be done for field buses e.g. Profibus and CANopen with up to 12 Mbit / s. The number of modules can be up to 20.

### Specifications


|  |                    |
|--|--------------------|
| <b>Contact Resistance Channel</b>      | 1                  |
| <b>Contact Resistance Data Channel</b> | 0,1                |
| <b>Dielectric Strength</b>             | 1000               |
| <b>Hollow Shaft Diameter Max</b>       | 25                 |
| <b>Insulation Resistance</b>           | 10 <sup>3</sup> MΩ |
| <b>IP Class</b>                        | IP50               |
| <b>Power Load Max</b>                  | 25                 |
| <b>Speed OF Rotation</b>               | 800                |
| <b>Temperature range from</b>          | -35                |
| <b>Temperature range to</b>            | 85                 |

Standard version  
 Example: Type SR05-25-02-03-11301-V100  
 (2 data channels, 3 power channels)

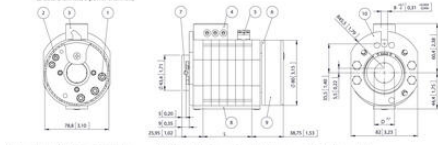

- 1 - Screw terminal M5 for power transmission
- 2 - Screw terminal M4 for signal transmission
- 3 - Terminal clamp for power without wire protection, with shock-hazard touch protection
- 4 - Wire lead-in for power possible on both sides
- 5 - Terminal clamp for signal transmission
- 6 - Rotating connection ring
- 7 - 4 x socket set screw DIN 914 M5
- 8 - Maintenance window
- 9 - Protective cover for connections
- 10 - Torque stop

Standard version  
 Example: Type SR05-25-02-03-11301-V100  
 (2 data channels, 3 power channels)

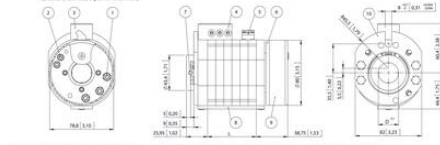

- 1 - Screw terminal M5 for power transmission
- 2 - Screw terminal M4 for signal transmission
- 3 - Terminal clamp for power without wire protection, with shock-hazard touch protection
- 4 - Wire lead-in for power possible on both sides
- 5 - Terminal clamp for signal transmission
- 6 - Rotating connection ring
- 7 - 4 x socket set screw DIN 914 M5
- 8 - Maintenance window
- 9 - Protective cover for connections
- 10 - Torque stop