


## ASCO - 356 SERIES DIRECT OPERATED

### 3/2 Valve Block

SCG356A819V

2 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

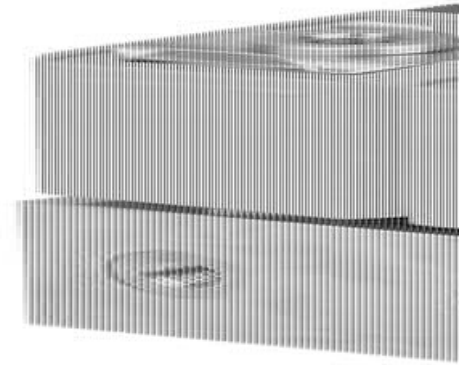

#### Product description

#### Specifications

<b>Approvals</b>	CSA, UL
<b>Differential Pressure Air Max</b>	10
<b>Differential Pressure Min</b>	0
<b>Differential Pressure Oil Max</b>	10
<b>Differential Pressure Water Max</b>	10
<b>Flow Factor / Flow Coefficient</b>	0,08
<b>Flow Max l/min Double</b>	1,33
<b>IP Class</b>	IP65
<b>No. Valves</b>	2
<b>Power Consumption</b>	4
<b>Response Closing</b>	5
<b>Response From Stroke</b>	10
<b>Temperature range from</b>	-10
<b>Temperature range of media from</b>	-10
<b>Temperature range of media to</b>	100
<b>Temperature range to</b>	60

