COLIBRI ENCLOSURES

22.902.120 Colibri S, rear wall C (29x29mm)

- Micro enclosure for cameras up to 30x30mm, such as Basler ACF
- Maximum lens diameter 39mm
- Inner length 146mm (S) and 176mm (M)
- Excellent heat dissipation, IP66 rated
- Wide selection of accessories available for mounting and maintenance






Product description

Enclosure Configurator

The Colibri housing is suitable for small cameras with $29 \times 29 \text{mm}$ or $30 \times 30 \text{mm}$ cross section and lenses up to 39 mm diameter. With just $50 \times 50 \text{mm}$ (w x h) and 181 mm, or 211 mm overall length is only slightly larger than the protected camera with lens and port. You can insert a plurality of connectors with up to 20.5 mm diameter. Thanks to the $30 \times 40 \text{mm}$ profile adapter it can be easily adapted to the modular system and be fixed as usual on the dovetail profiles. The Colibri is the ideal solution for space- and cost-critical applications where the comprehensive accessories of Salamander enclosures are not required.

autoVimation offers a wide selection of enclosures to suit even the most specific requirements. To find a suitable enclosure please see the Enclosure Configurator (link above) or contact OEM Finland sales team for additional info!

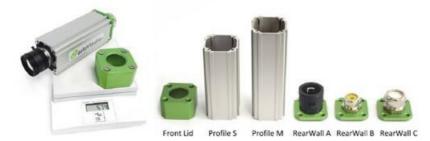

Order Numbers:

Colibri S		Colibri M			
Camera Height	Rear Wall	Order Number	Camera Height	Rear Wall	Order Number
29mm	A	22.900.120	29mm	A	22.900.150
	В	22.901.120		В	22.901.150
	С	22.902.120		С	22.902.150
30mm	A	23.000.120	30mm	A	22.900.150
	В	23.001.120		В	23.001.150
	С	23.002.120		С	23.002.150

Specifications

Height	50
Inner length	146
IP Class	IP66
Length	156
Max camera height	30

Max camera width	30
Max connector size	20,5
Max lens diameter	39
Weight	420
Width	50
Window seal	Hytrel



Product ID	Camera Height	Enclosure Type	Rear Wall/Front Lid	Length
2	29 = 2.9 30 = 3.0	0	Front Lid Standard Flat 0 Rear Wall A 5 1 Rear Wall B 6 2 Rear Wall C 7	5: 120 M: 150



