

KUEBLER - INCREMENTAL ENCODER, SENDIX H120

SERIE H120

- High durability
- Many mounting options
- High degree of enclosure
- Wide temperature range



Product description

The Sendix H120 series is designed to fit in tough environments. Specialized for high voltage motors, generators, steel and crane industry. The sensor has a high enclosure degree, IP66, IP67 and a wide temperature range -40 to +100 ° C. It is also equipped with "HD-Safety Lock™, which includes double gaskets, against moisture and dust. All layers are also sturdier and stronger.

The many choices of contact types make this pulse sensor very flexible, sometimes the optical fiber, M12, M23 and terminal boxes are selected. The H120 can be delivered with a fastening lever in different lengths.



Please refer to the image below for ordering information.

Order code		8.H120 . XXXXX . XXXX					
Hollow shaft version		Type	a	b	c	d	e
a	Flange						
	1 = without mounting aid						
	2 = with fastening arm 70 mm [2.76"] ²⁾						
	3 = with fastening arm 100 mm [3.93"] ²⁾						
	4 = with fastening arm 150 mm [5.91"] ²⁾						
	5 = with stator coupling, ø 119 mm [4.69"]						
b	Through hollow shaft						
	2 = ø 16 mm [0.63"]						
	3 = ø 20 mm [0.79"]						
	5 = ø 25 mm [0.98"]						
	7 = ø 28 mm [1.10"]						
	6 = ø 1"						
	<i>Blind hollow shaft, with central fastening insertion depth max. 53 mm [2.09"]</i>						
	A = ø 12 mm [0.47"]						
	B = ø 16 mm [0.63"]						
	<i>Blind hollow shaft, cone with central fastening insertion depth max. 22.5 mm [0.89"]</i>						
	K = ø 17 mm [0.67"], 1: 10						
c	Output circuit / power supply						
	4 = RS422 (with inverted signal) / 5 V DC						
	1 = RS422 (with inverted signal) / 10 ... 30 V DC						
	5 = push-pull (with inverted signal) / 10 ... 30 V DC						
	6 = push-pull (with inverted signal) / 10 ... 30 V DC, power version up to 350 m						
	B = optical fiber + RS422 (with inverted signal) / 5 V DC ³⁾						
	A = optical fiber + RS422 (with inverted signal) / 10 ... 30 V DC ³⁾						
	C = optical fiber + push-pull (with inverted signal) / 10 ... 30 V DC ³⁾						
d	Type of connection						
	1 = radial cable, 1 m [3.28'] PVC						
	A = radial cable, special length PVC *)						
	2 = radial M12 connector, 8-pin, ccw						
	4 = radial M23 connector, 12-pin, ccw						
	D = radial M23 connector, 12-pin, cw						
	K = terminal box with plug-in spring terminal connectors, rotatable through 180°						
	L = optical fiber connector + radial M23 connector, 12-pin, cw ⁴⁾						
	*) Available special lengths (connection type A): 2, 3, 5, 8, 10, 15 m [6.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.H120.121A.2048.0030 (for cable length 3 m)						
e	Pulse rate						
	50, 360, 512, 600, 1000, 1024, 1500, 2000, 2048, 2500, 4096, 5000 (e.g. 360 pulses => 0360)						
	<i>Optional on request</i> - other pulse rates - Ex 2/22 ⁵⁾						

Housing diameter	120
IP Class	IP66, IP67
Pulse Max	5000
Shaft Diameter max	25
Shaft Diameter min	12
Supply Voltage DC Max	30
Supply Voltage DC Min	5
Temperature range from	-40
Temperature range to	100


Output circuit	Type of connection	Cable (insulate around wires individually before initial start-up)
S, A, S, A	1	Signal: Cable colour:
S, A, S, A	2	M12 connector, 8-pin
S, A, S, A, A, A, C	4, 5, 6, 7	M23 connector, 13-pin

Output circuit	Type of connection	Terminal connections
S, A, S, A	K	Signal: Pin:

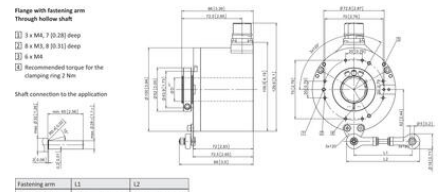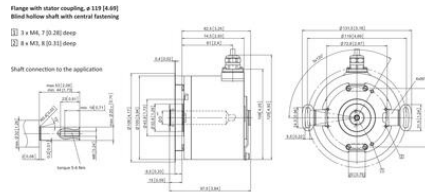


Fastening arm	L1		L2	
	70 mm (2.76)	66.74 (2.62.91)	82.92 (3.26.32)	100 mm (3.94)
100 mm (3.94)	66.74 (2.62.91)	82.92 (3.26.32)	112.12 (4.41.46)	130 mm (5.12)
150 mm (5.91)	66.74 (2.62.91)	82.92 (3.26.32)	142.12 (5.58.47)	

1) With a shaft diameter > 12 mm (0.47") the resolution-resistance of L1 is limited to guaranteed.
 2) Pin 4 should be attached to connector housing.

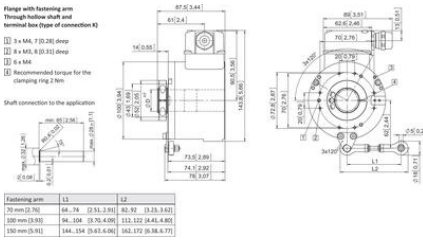


Fastening arm	L1		L2	
	70 mm (2.76)	66.74 (2.62.91)	82.92 (3.26.32)	100 mm (3.94)
100 mm (3.94)	66.74 (2.62.91) <th>82.92 (3.26.32)</th> <td>112.12 (4.41.46) <td>130 mm (5.12)</td> </td>	82.92 (3.26.32)	112.12 (4.41.46) <td>130 mm (5.12)</td>	130 mm (5.12)
150 mm (5.91)	66.74 (2.62.91) <td>82.92 (3.26.32)</td> <td>142.12 (5.58.47)</td> <td></td>	82.92 (3.26.32)	142.12 (5.58.47)	

1) With a shaft diameter > 12 mm (0.47") the resolution-resistance of L1 is limited to guaranteed.

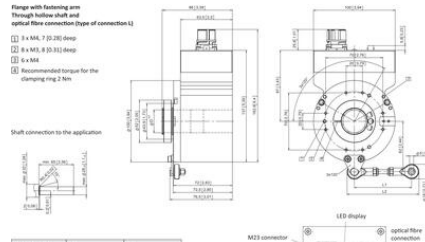

Fastening arm	L1		L2	
	70 mm (2.76)	66.74 (2.62.91)	82.92 (3.26.32)	100 mm (3.94)
100 mm (3.94)	66.74 (2.62.91) <th>82.92 (3.26.32)</th> <td>112.12 (4.41.46)</td> <td>130 mm (5.12)</td>	82.92 (3.26.32)	112.12 (4.41.46)	130 mm (5.12)
150 mm (5.91)	66.74 (2.62.91) <td>82.92 (3.26.32)</td> <td>142.12 (5.58.47)</td> <td></td>	82.92 (3.26.32)	142.12 (5.58.47)	

1) With a shaft diameter > 12 mm (0.47") the resolution-resistance of L1 is limited to guaranteed.

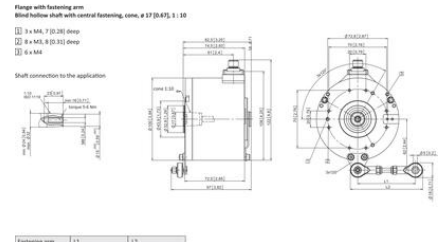

Fastening arm	L1		L2	
	70 mm (2.76)	66.74 (2.62.91)	82.92 (3.26.32)	100 mm (3.94)
100 mm (3.94)	66.74 (2.62.91) <th>82.92 (3.26.32)</th> <td>112.12 (4.41.46)</td> <td>130 mm (5.12)</td>	82.92 (3.26.32)	112.12 (4.41.46)	130 mm (5.12)
150 mm (5.91)	66.74 (2.62.91) <td>82.92 (3.26.32)</td> <td>142.12 (5.58.47)</td> <td></td>	82.92 (3.26.32)	142.12 (5.58.47)	

1) With a shaft diameter > 12 mm (0.47") the resolution-resistance of L1 is limited to guaranteed.