


DATALOGIC DE2X12 HALOGEN 2D MP

DE2X12-SR



- Maximum resolution DL/WA 6 mils, SR/MR 7.5 mils
- Humidity (Non-Condensing) 5 - 95%
- 21-pin ZIF connector
- Ambient light 0-100,000 lux

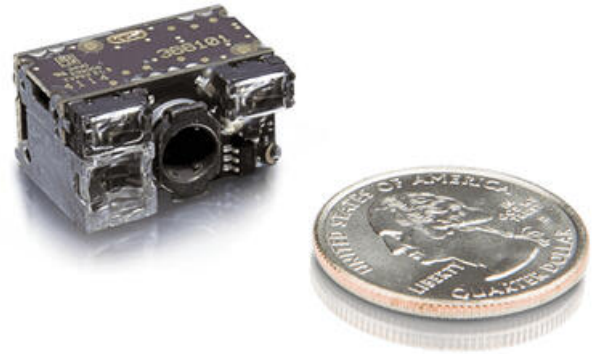

Product description

Specifications

| | |
|----------------------------------|---|
| 1D Code types | Auto discriminates all standard 1D codes |
| 2D Code Types | Aztec Code, China Han Xin Code, Data Matrix, MaxiCode, Micro QR Code, QR Code |
| Approvals | RoHS |
| Dimension (mm) | 11.4 x 21 x 15.75 |
| Humidity | 5 - 95% (Non-condensing) |
| Immunity To Ambient Light | 0 - 100,000 lux |
| Interface | 21-pin ZIF connector |
| Light Source | Illumination: White LEDs |
| Postal Code Types | China Post, IMB, KIX Post, Planet Code, Postnet, Royal Mail Code (RM4SCC), Australia Postal, Japan Postal, Korea Post |
| Readable code types | 1D / Linear Codes, 2D Codes, Postal Codes, Stacked Codes |
| Reading Angle Window | Pitch: +/-60°; Tilt: +/- 180°; Skew: +/-60° |
| Resolution | 7.5 mils |
| Stacked Code Types | EAN/JAN Composites, GS1 Databar Composites, GS1 Databar Expanded Stacked, GS1 Databar Stacked, GS1 Databar Stacked Omnidirectional, Macro PDF, Micro PDF 417, PDF 417, UPC A/E Composites |

| | |
|--|-----|
| Temperature range bearing, from | -40 |
| Temperature range bearing, to | 70 |
| Temperature range from | -30 |
| Temperature range to | 55 |
| Weight | 9 |