

A2A2840-14GMUV






## Product description

### Specifications

<b>Approvals</b>	CE, EAC, FCC, GigE Vision, RoHS, UL
<b>Digital Inputs</b>	1
<b>Frame Rate Max</b>	14
<b>Height</b>	29
<b>IP Class</b>	IP30
<b>Length</b>	55,5
<b>Lens Barrel</b>	C-Mount
<b>Operating temperature</b>	0°C ... 50°C
<b>Pixel Beyond</b>	Yes
<b>Pixel size</b>	2.74 x 2.74
<b>Power Consumption</b>	3,2
<b>Resolution</b>	8MP
<b>Resolution Max</b>	2840 x 2840 px
<b>Sensor model</b>	IMX487
<b>Sensor size</b>	2/3"
<b>Sensor supplier</b>	Sony
<b>Shutter type</b>	Global

<b>Wave-Length</b>	UV
<b>Weight</b>	100
<b>Width</b>	29

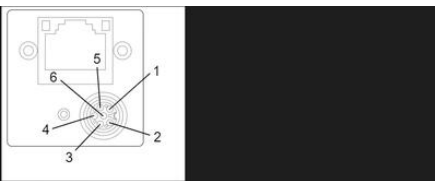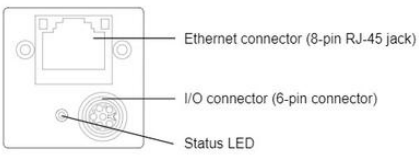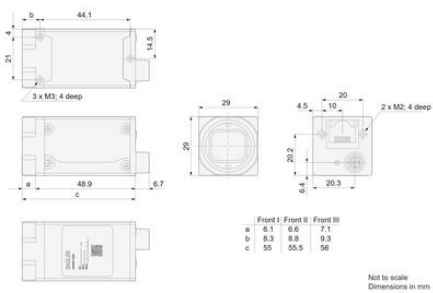

Pin Numbering for the I/O Connector		
Pin	Line	Function
1	-	12-24 VDC camera power
2	Line 1	Opto-coupled I/O input line
3	-	Ground for opto-coupled I/O lines
4	Line 2	General purpose I/O (GPIO) line
5	Line 3	General purpose I/O (GPIO) line
6	-	Ground for camera power and General Purpose I/O (GPIO) lines

