



AUER - ELECTRONIC MULTI-SIREN ES1-ES2

ES1/ES2 series

C110620005

Beacon Siren Multitone 24v DC ES1

- 32 selectable tones
- IP65
- 86–106 dB






Product description

ES1/ES2 is a cost effective siren with 32 selectable tones. The volume and tone selection are set by dip-switches. IP 65 makes it suitable for mounting both indoors and outdoors.

Specifications

Diameter	93
IP Class	IP65
Nominal current max	0,035
Nominal current min	0,006
Number of tones	32
Sound control	Yes
Sound level max	106
Sound level min	86
Supply Voltage DC Max	24
Supply Voltage DC Min	24
Temperature range from	-20
Temperature range to	70
Terminal connection	2,5
Tone frequency max	2900
Tone frequency min	440
Weight	250

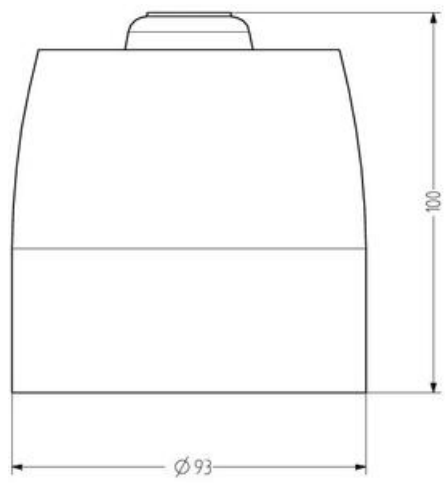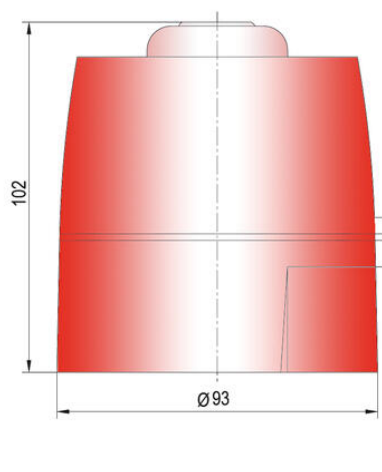

Tone table

No.	Sound	Description	DR	End stage alarm Hz
1	LF sweep	800-1000 Hz @ 0.5 s	001	800 count
2	alternative awake	800/700 Hz @ 2 Hz	010	800 count
3	awake tone	800/1000 Hz @ 0.5 s	010	800 count
4	alternative awake	900/200 Hz @ 2 Hz	010	500 count
5	MF back up interrupted tone	2.800 Hz @ 1.2 s on/off	020	2.800 count
6	LF back up alarm	800 Hz @ 100 ms on/off	020	800 count
7	LF back up interrupted tone, fast	2.800 Hz @ 100 ms on/off	020	800 count
8	LF continuous tone 850/850	800 Hz on/off	020	some tone
9	sweep tone	800/900 Hz @ 1 Hz	030	800 count
10	acceleration alarm	interrupted tone 970 Hz @ 0.625 ms on/off	030	500+200
				0.75 s on
				0.25 s off
				500+200
				0.5 s on
11	Dutch sweep tone	970 Hz on/off	030	0.5 s on
12	integrated sweep tone	800/900 Hz @ 2 Hz	030	500 count
13	sweep tone	800/700 Hz @ 2 Hz	030	800 count
14	alternative MF slow sweep	2.300/2.100 Hz @ 2 Hz	030	2.400 count
15	MF LF sweep	2.400/2.800 Hz @ 2 Hz	030	2.400 count
16	LF temporal pattern LF	900 Hz @ 0.5 s on/off, 0.5 s off for 1.5 s, repeat	030	800 count
17	interrupted tone 85 Standard	800 Hz @ 0.5 s on/off	030	800 count
18	MF/MF LF 850/850 Hz 11000	interrupted tone 870 Hz @ 0.5 s on/off	030	some tone
19	interrupted tone, medium	1000 Hz @ 0.25 s on/off	030	800 count
20	800/800 Hz	970 Hz @ 0.5 s on/off	030	some tone
21	continuous tone	800 Hz	030	some tone
22	LF tone	800/700 Hz sweep @ 10 Hz	030	800 count
23	MF continuous	2.800 Hz	030	2.800 count
24	sweep tone	800-970 Hz @ 2 Hz	030	800 count
25	Character DR tone	sweep 1.000-800 Hz @ 1 Hz	030	800 count
26	breakfast frequency	interrupted tone 840 Hz @ 100 ms on/off	030	some tone
27	French tone 870/870	550 Hz @ 100 ms and 940 Hz @ 100 ms	030	800 count
28	breakfast of clear signal	continuous 840 Hz	030	some tone
29	LF temporal pattern LF	2.800 Hz @ 0.5 s on/off, 0.5 s, then off for 1.5 s, repeat	030	2.800 count
30	slow sweep ramp, short	800/1.200 Hz sweep time falling 0.25 s	030	800 count
31	FF 850/1.200	alternating tone 800/700 Hz @ 2 Hz	030	800 count
32	slow sweep ramp, long	800/1.200 Hz @ 0.5 s ramp/2 s falling	030	800 count

The sound pressure decreases by 6 dB when doubling the distance, the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																					
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120	
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114	
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	102
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	96
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92
50	30	35	40	45	50	55	57	59	61	63	65	67	69	71	73	75	77	79	81	83	85	87
100	25	30	35	40	45	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80	82
200	20	25	30	35	40	45	47	49	51	53	55	57	59	61	63	65	67	69	71	73	75	77
500	15	20	25	30	35	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72

The sound pressure decreases by 6 dB when doubling the distance