

INSULATED BOOTLACE FERRULE FOR DUAL CABLES

V30AE001145

Ferrules 2x0.5sq-8mm White (Pack 500)

- Funnel feed-in made of polypropylene
- Heat resistant up to 120 °C
- For wires from 0.5...16 mm²
- Material: E-Cu/A-Cu, galvanically tin-plated





Product description


Specifications

Color	White
Conductor tube	Copper alloy
Contact surface	Galvanic tin-plated, shiny
Country of origin	DE
Cross Section Max	0.5
Diameter of tube	1.4
DIN 46228-1:1992	No
DIN 46228-4:1990	Yes
Length	14
Length of tube	8
Operating temperature from	-5
Operating temperature to	105
Pack Size	500
Plastic collar	Polypropylene-homopolymer
Rated wire cross section to (AWG)	20
Standard	UL (DIN)/French Standard

Stripping Length	11
Tariff code	85369010
Thickness of collar	0.3
Thickness of tube	0.15
Weight	0.12

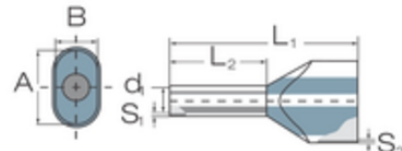

Bezeichnung Description	AWG	Fabcode/Bestell-Nr. Cable code/Order no.			Nennmaße mm Dimensions mm								Stück Pcs
		Zur	DN	HTS	L1	L2	d1	d2	S1	S2	A	B	
2 x 0.34	8	N	2 x 22	V504E000684	V504E000684								800
2 x 0.8	8	N	2 x 20	V504E000704	V504E000704								800
2 x 0.8	10	HL	2 x 20	V504E000708	V504E000708								800
2 x 0.8	12	L	2 x 20	V504E000708	V504E000708								800
2 x 0.75	8	N	2 x 18	V504E000608	V504E000608								800
2 x 0.75	10	HL	2 x 18	V504E000731	V504E000731								800
2 x 0.75	12	HL	2 x 18	V504E000608	V504E000608								800
2 x 0.75	18	L	2 x 18	V504E000740	V504E000740								800
2 x 1	8	N	2 x 18	V504E000608	V504E000608								800
2 x 1	12	HL	2 x 18	V504E000731	V504E000731								800
2 x 1	14	HL	2 x 18	V504E000608	V504E000608								800
2 x 1	18	L	2 x 18	V504E000740	V504E000740								800
2 x 1.5	8	N	2 x 18	V504E000608	V504E000608								800
2 x 1.5	12	HL	2 x 18	V504E000731	V504E000731								800
2 x 1.5	14	HL	2 x 18	V504E000608	V504E000608								800
2 x 1.5	18	L	2 x 18	V504E000740	V504E000740								800
2 x 2.5	10	N	2 x 14	V504E000601	V504E000601								800
2 x 2.5	12	HL	2 x 14	V504E000748	V504E000748								800
2 x 2.5	18	L	2 x 14	V504E000750	V504E000750								800
2 x 4	12	N	2 x 12	V504E000748	V504E000748								800
2 x 4	16	L	2 x 12	V504E000748	V504E000748								800
2 x 6	10	N	2 x 10	V504E000601	V504E000601								800
2 x 6	16	L	2 x 10	V504E000748	V504E000748								800
2 x 10	12	N	2 x 8	V504E000748	V504E000748								800
2 x 10	16	L	2 x 8	V504E000748	V504E000748								800
2 x 10	18	N	2 x 8	V504E000748	V504E000748								800
2 x 10	20	L	2 x 8	V504E000748	V504E000748								800

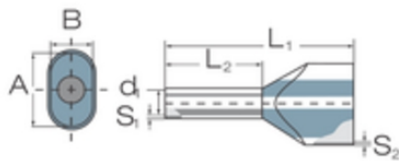

Bezeichnung Description	AWG	Fabcode/Bestell-Nr. Cable code/Order no.			Nennmaße mm Dimensions mm								Stück Pcs
		Zur	DN	HTS	L1	L2	d1	d2	S1	S2	A	B	
2 x 0.34	8	N	2 x 22	V504E000684	V504E000684								800
2 x 0.8	8	N	2 x 20	V504E000704	V504E000704								800
2 x 0.8	10	HL	2 x 20	V504E000708	V504E000708								800
2 x 0.8	12	L	2 x 20	V504E000708	V504E000708								800
2 x 0.75	8	N	2 x 18	V504E000608	V504E000608								800
2 x 0.75	10	HL	2 x 18	V504E000731	V504E000731								800
2 x 0.75	12	HL	2 x 18	V504E000608	V504E000608								800
2 x 0.75	18	L	2 x 18	V504E000740	V504E000740								800
2 x 1	8	N	2 x 18	V504E000608	V504E000608								800
2 x 1	12	HL	2 x 18	V504E000731	V504E000731								800
2 x 1	14	HL	2 x 18	V504E000608	V504E000608								800
2 x 1	18	L	2 x 18	V504E000740	V504E000740								800
2 x 1.5	8	N	2 x 18	V504E000608	V504E000608								800
2 x 1.5	12	HL	2 x 18	V504E000731	V504E000731								800
2 x 1.5	14	HL	2 x 18	V504E000608	V504E000608								800
2 x 1.5	18	L	2 x 18	V504E000740	V504E000740								800
2 x 2.5	10	N	2 x 14	V504E000601	V504E000601								800
2 x 2.5	12	HL	2 x 14	V504E000748	V504E000748								800
2 x 2.5	18	L	2 x 14	V504E000750	V504E000750								800
2 x 4	12	N	2 x 12	V504E000748	V504E000748								800
2 x 4	16	L	2 x 12	V504E000748	V504E000748								800
2 x 6	10	N	2 x 10	V504E000601	V504E000601								800
2 x 6	16	L	2 x 10	V504E000748	V504E000748								800
2 x 10	12	N	2 x 8	V504E000748	V504E000748								800
2 x 10	16	L	2 x 8	V504E000748	V504E000748								800
2 x 10	18	N	2 x 8	V504E000748	V504E000748								800
2 x 10	20	L	2 x 8	V504E000748	V504E000748								800