

## HONSBERG - RVM SERIES FLOW SWITCH

### Piston

RVM-008GM013  
Flow SW. 0.04-0.13 l/min G1/4"

- Switching Range 0,04..3 l/m H<sub>2</sub>O
- Water (gas and aggressive media available on request)
- G1/4"
- Brass or Stainless Steel Wetted Parts
- Max Pressure 300 bar






### Product description

Mechanical flow switch, for fluid media, with magnetic triggering of a reed switch. Robust construction in brass or stainless steel.

### Specifications

<b>Accuracy</b>	± 10%
<b>Connection</b>	1/4 "
<b>Contact Rating Max</b>	20
<b>Electrical Connection</b>	Plug connector DIN 43650-C
<b>Flow Max l/min Double</b>	0,17
<b>Flow Range Max</b>	0,13
<b>Flow Range Min</b>	0,04
<b>Function</b>	Flask, reed contact, ending
<b>Hysteresis</b>	min 1 ml / min, depending on breaking value
<b>IP Class</b>	IP65
<b>Pressure drop</b>	0.02-0.2 bar at maximum flow
<b>Pressure Range Max</b>	300
<b>Temperature range of media to</b>	100
<b>Weight</b>	0,14
<b>Viscosity</b>	1

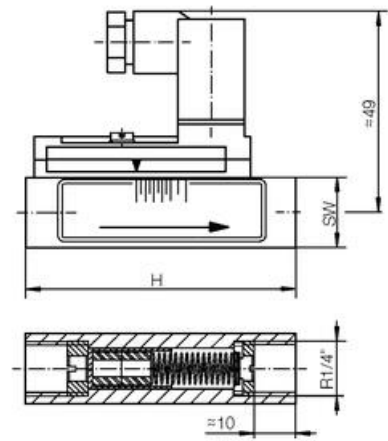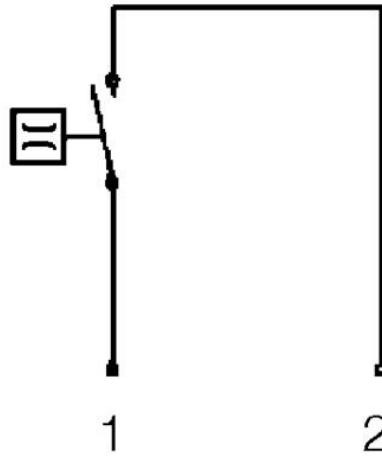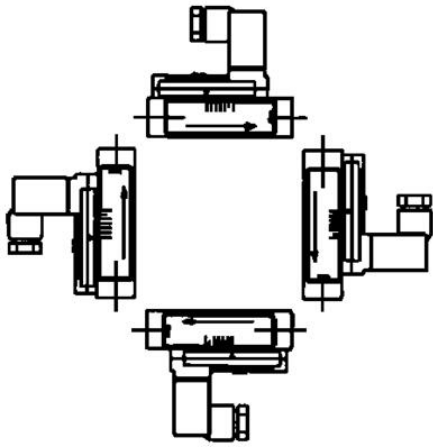

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15