


## DUELCO NST-2008F SAFETY RELAY

42080010

- Supply voltage 24 V DC
- 3 NO safety output+ 1 NC signal output
- Also suitable for use with non-contacting safety limit switches

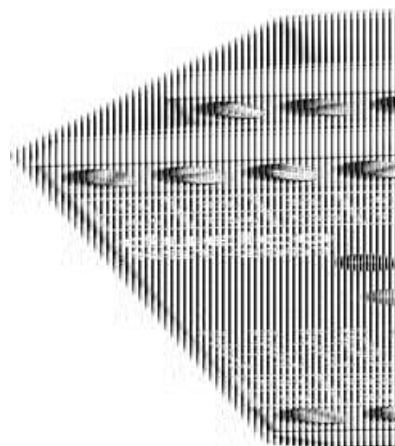

### Product description

The Duelcon NST-2008F is intended for monitoring HS buttons and safety limits.

Thanks to the current limitation of the emergency stop circuit (max. 100mA), the NST-2008F is well suited for monitoring safety magnetic switches.

### Specifications

<b>IP Class Connection</b>	IP20
<b>IP Class Housing</b>	IP40
<b>PL</b>	e
<b>Power Consumption</b>	1,5
<b>Safety category</b>	4
<b>Safety outputs NO</b>	3 NO
<b>Signal output NC</b>	1 NC
<b>Supply voltage</b>	24 V DC
<b>Temperature range from</b>	-20
<b>Temperature range to</b>	50
<b>Tolerance</b>	± 10 %

