


CROUZET SWITCHES - V4

83170002

C/O W2 TERMINALS, STANDARD

- Load 0.1-10 A 250 V ac
- Minimum load 1 mA 4 V dc
- Available with sponge trigger
- Control arm can be fitted in two different positions


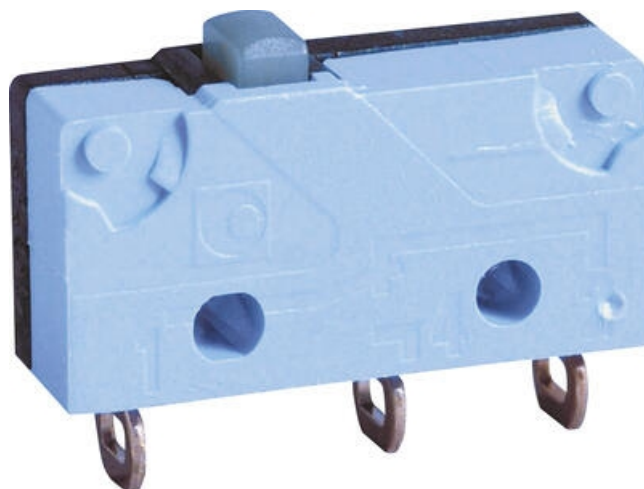


Product description


Specifications

Allowable Operating Force Max	10
Contact Gap	0,4
Hysteresis Max	0,15
IP Class	IP40
Operating Force Max	1,5
Operating Power Total Max	1,8
Over Movement My	0,5
Rated current at 250 V AC	10
Return Movement Force Min	0,3
Sleep Max	9,2
Switching Point	8,4 ±0,3 mm
Temperature range from	-40
Temperature range to	125
Thermal current at 250 V AC	12,5


W2

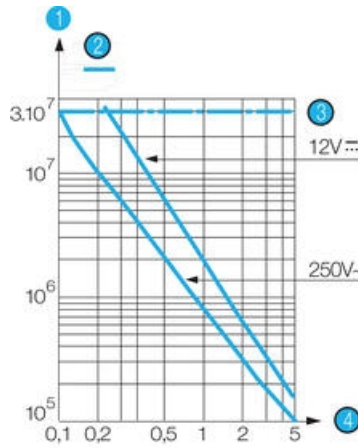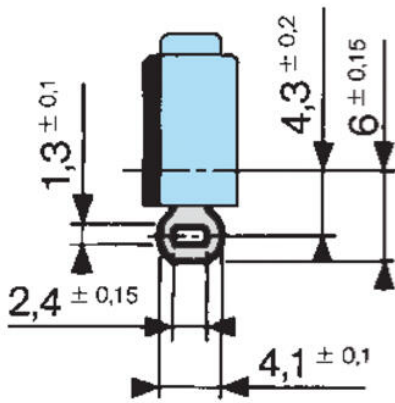

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

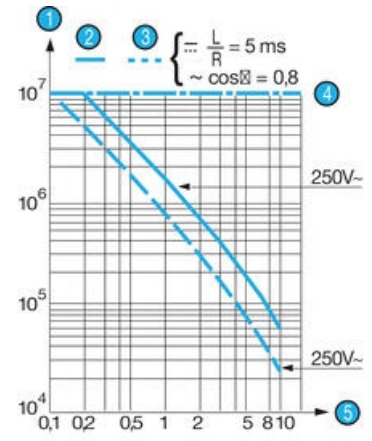

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

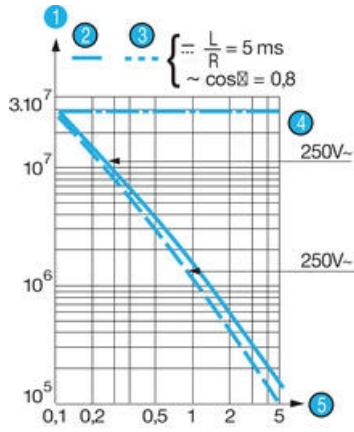

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion




83 170 Asymmetric version

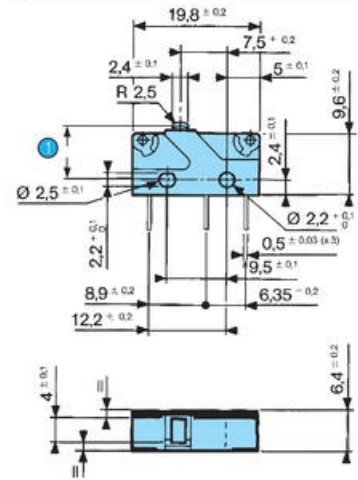


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

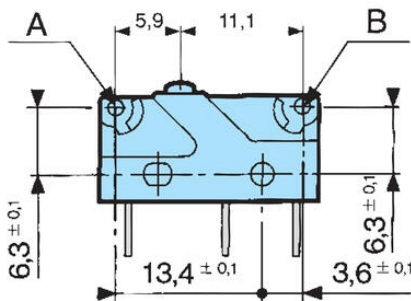


W2




W7A5




X1 - X1S




X2 - X2S




X3 - X3S




83 170 Symmetrical version

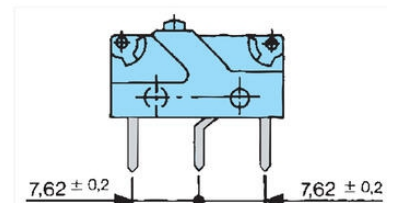

170 E
Arm with roll

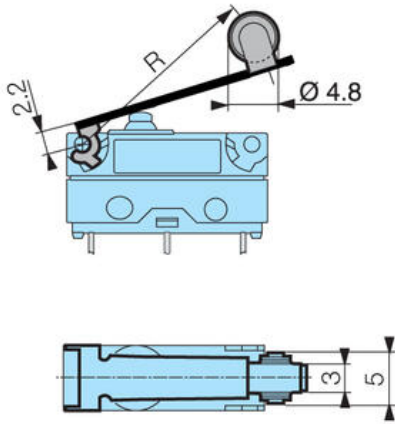

170 A
Straight-arm

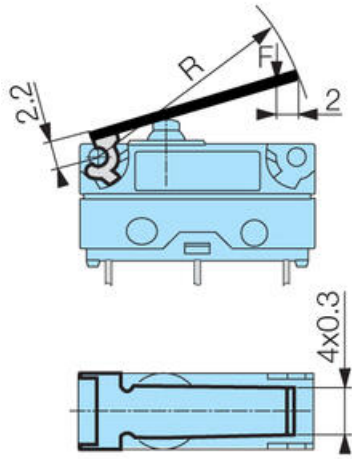

170 F
Arm with simulated scroll

