



## SUCO - 0601/0602 PRESSURE SENSOR

### Performance series

0601200411002

0-10V, 0..2 bar, G1/4-E, NBR, M12

- Measuring range up to 100 bar
- Ceramic sensor
- Small and compact
- Stainless steel housing



### Product description

The SUCO 0601/0602 performance series pressure sensor is a small, compact and cost effective pressure monitoring solution. Offering six standard pressure ranges with options of four different electrical connectors a thread of G1/4 and 0-10V or 4-20mA outputs. The 06 series uses a ceramic sensor in thick film technology which is housed in a stainless steel body.

Common applications include mobile hydraulics and power packs.


### Specifications

<b>Accuracy</b>	±1% FS
<b>Burst Pressure</b>	8
<b>Connection Thread</b>	G1/4-E
<b>Electrical connection</b>	M12x1 4-pole
<b>IP Class</b>	IP67
<b>Lifespan Mechanical</b>	5 million cycles
<b>Long-Term Stability</b>	±0.3% FS p.a.
<b>Material of body</b>	Stainless steel 1.4305
<b>Materials Wetted Parts</b>	Stainless steel 1.4305, Ceramic, NBR
<b>Overpressure protection</b>	4 bar
<b>Pressure Range Max</b>	2
<b>Pressure Range Min</b>	0

Pressure reference	Gauge
Pressure rise	1 bar/ms
Repeatability & Reproducibility	±0.1% FS
Response Time	2
Shock Resistance	500m / s <sup>2</sup> ; 11 ms half sine wave; DIN EN 60068-2-27
Signal type	0-10 V
Supply Voltage DC Max	32
Supply Voltage DC Min	11
Temperature ambient from	-30
Temperature ambient to	100
Temperature error	±0.04% FS/°C
Temperature range of media from	-30
Temperature range of media to	100
Weight	80
Vibration Resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6



DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15170-A1-4.1																																										
<table border="1"> <tr> <th>Pin</th> <th>0601</th> <th>0602</th> </tr> <tr> <td>1</td> <td>U<sub>ve</sub></td> <td>U<sub>ve</sub></td> </tr> <tr> <td>2</td> <td>Gnd</td> <td>I<sub>ve</sub></td> </tr> <tr> <td>3</td> <td>U<sub>ve</sub></td> <td>nc*</td> </tr> </table> <p>IP65  x = 60 mm without coupler socket  x = 77 mm with coupler socket  Order number: 013</p>	Pin	0601	0602	1	U <sub>ve</sub>	U <sub>ve</sub>	2	Gnd	I <sub>ve</sub>	3	U <sub>ve</sub>	nc*	<table border="1"> <tr> <th>Pin</th> <th>0601</th> <th>0602</th> </tr> <tr> <td>1</td> <td>U<sub>ve</sub></td> <td>U<sub>ve</sub></td> </tr> <tr> <td>2</td> <td>U<sub>ve</sub></td> <td>nc*</td> </tr> <tr> <td>3</td> <td>Gnd</td> <td>I<sub>ve</sub></td> </tr> <tr> <td>4</td> <td>nc*</td> <td>nc*</td> </tr> </table> <p>IP67  x = 54 mm  Order number: 002</p>	Pin	0601	0602	1	U <sub>ve</sub>	U <sub>ve</sub>	2	U <sub>ve</sub>	nc*	3	Gnd	I <sub>ve</sub>	4	nc*	nc*	<table border="1"> <tr> <th>Pin</th> <th>0601</th> <th>0602</th> </tr> <tr> <td>1</td> <td>U<sub>ve</sub></td> <td>U<sub>ve</sub></td> </tr> <tr> <td>2</td> <td>Gnd</td> <td>nc*</td> </tr> <tr> <td>3</td> <td>U<sub>ve</sub></td> <td>I<sub>ve</sub></td> </tr> <tr> <td>4</td> <td>nc*</td> <td>nc*</td> </tr> </table> <p>IP67, IP69K  x = 56 mm  Order number: 004</p>	Pin	0601	0602	1	U <sub>ve</sub>	U <sub>ve</sub>	2	Gnd	nc*	3	U <sub>ve</sub>	I <sub>ve</sub>	4	nc*	nc*
Pin	0601	0602																																										
1	U <sub>ve</sub>	U <sub>ve</sub>																																										
2	Gnd	I <sub>ve</sub>																																										
3	U <sub>ve</sub>	nc*																																										
Pin	0601	0602																																										
1	U <sub>ve</sub>	U <sub>ve</sub>																																										
2	U <sub>ve</sub>	nc*																																										
3	Gnd	I <sub>ve</sub>																																										
4	nc*	nc*																																										
Pin	0601	0602																																										
1	U <sub>ve</sub>	U <sub>ve</sub>																																										
2	Gnd	nc*																																										
3	U <sub>ve</sub>	I <sub>ve</sub>																																										
4	nc*	nc*																																										
<table border="1"> <tr> <th>Pin</th> <th>0601</th> <th>0602</th> </tr> <tr> <td>1</td> <td>U<sub>ve</sub></td> <td>nc*</td> </tr> <tr> <td>2</td> <td>Gnd</td> <td>I<sub>ve</sub></td> </tr> <tr> <td>3</td> <td>U<sub>ve</sub></td> <td>U<sub>ve</sub></td> </tr> </table> <p>IP67  x = 61 mm  Order number: 007</p>	Pin	0601	0602	1	U <sub>ve</sub>	nc*	2	Gnd	I <sub>ve</sub>	3	U <sub>ve</sub>	U <sub>ve</sub>	<table border="1"> <tr> <th>Pin</th> <th>0601</th> <th>0602</th> </tr> <tr> <td>A</td> <td>U<sub>ve</sub></td> <td>U<sub>ve</sub></td> </tr> <tr> <td>B</td> <td>Gnd</td> <td>nc*</td> </tr> <tr> <td>C</td> <td>U<sub>ve</sub></td> <td>I<sub>ve</sub></td> </tr> </table> <p>IP67, IP69K  x = 61 mm  Order number: 010</p>	Pin	0601	0602	A	U <sub>ve</sub>	U <sub>ve</sub>	B	Gnd	nc*	C	U <sub>ve</sub>	I <sub>ve</sub>																			
Pin	0601	0602																																										
1	U <sub>ve</sub>	nc*																																										
2	Gnd	I <sub>ve</sub>																																										
3	U <sub>ve</sub>	U <sub>ve</sub>																																										
Pin	0601	0602																																										
A	U <sub>ve</sub>	U <sub>ve</sub>																																										
B	Gnd	nc*																																										
C	U <sub>ve</sub>	I <sub>ve</sub>																																										

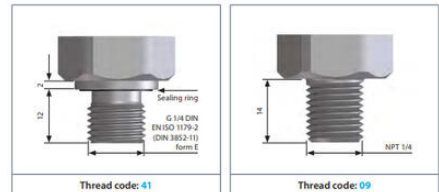



**DIN EN 175301-803-A**

Pin	0601	0602
1	U <sub>ve</sub>	U <sub>ve</sub>
2	Gnd	I <sub>sup</sub>
3	U <sub>sup</sub>	nc*

IP65  
 x = 60 mm without coupler socket  
 x = 77 mm with coupler socket  
 Order number: 013

**M 12 - DIN EN 61076-2-101 A**

Pin	0601	0602
1	U <sub>ve</sub>	U <sub>ve</sub>
2	U <sub>sup</sub>	nc*
3	Gnd	I <sub>sup</sub>
4	nc*	nc*

IP67  
 x = 54 mm  
 Order number: 002

**ISO 15170-A1-4.1**

Pin	0601	0602
1	U <sub>ve</sub>	U <sub>ve</sub>
2	Gnd	nc*
3	U <sub>sup</sub>	I <sub>sup</sub>
4	nc*	nc*

IP67, IP6X3K  
 x = 56 mm  
 Order number: 004

**AMP Superseal 1.5\***

Pin	0601	0602
1	U <sub>sup</sub>	nc*
2	Gnd	I <sub>sup</sub>
3	U <sub>ve</sub>	U <sub>ve</sub>

IP67  
 x = 61 mm  
 Order number: 007

**Deutsch DT04-3P**

Pin	0601	0602
A	U <sub>ve</sub>	U <sub>ve</sub>
B	Gnd	nc*
C	U <sub>sup</sub>	I <sub>sup</sub>

IP67, IP6X3K  
 x = 61 mm  
 Order number: 010

