

HONSBERG - RVM SERIES FLOW SWITCH

Piston

RVM-008GM013

- Switching Range 0,04..3 l/m H₂O
- Water (gas and aggressive media available on request)
- G $\frac{1}{4}$ "
- Brass or Stainless Steel Wetted Parts
- Max Pressure 300 bar






Product description

Mechanical flow switch, for fluid media, with magnetic triggering of a reed switch. Robust construction in brass or stainless steel.




Specifications

Accuracy	± 10%
Connection	1/4 "
Contact Rating Max	20
Electrical Connection	Plug connector DIN 43650-C
Flow Max l/min Double	0,17
Flow Range Max	0,13
Flow Range Min	0,04
Function	Flask, reed contact, ending
Hysteresis	min 1 ml / min, depending on breaking value
IP Class	IP65
Material Bolt	Brass
Material of body	Nickel-plated brass
Material of seals	NBR
Materials Spring	Stainless steel 316Ti
Pressure drop	0.02-0.2 bar at maximum flow

Pressure Range Max	300
Temperature range of media to	100
Type of flow component	Flow Switches
Weight	0,14
Viscosity	1
Voltage AC max	200

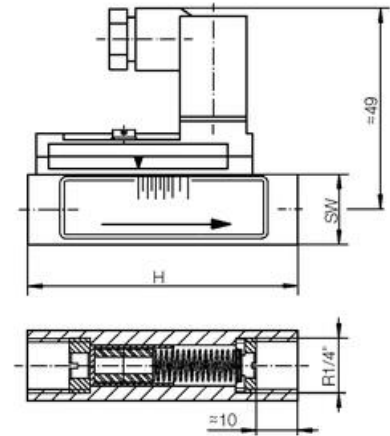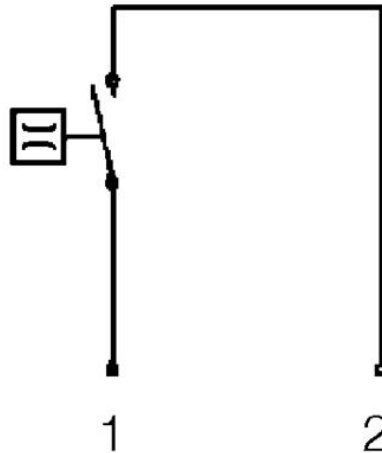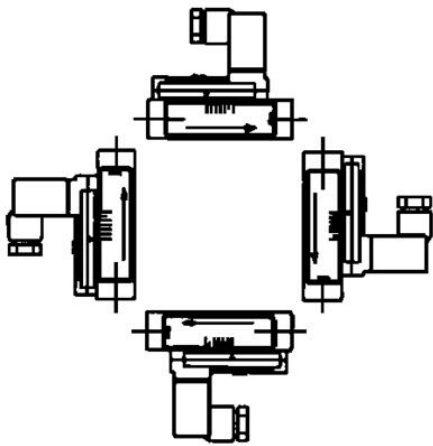

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15

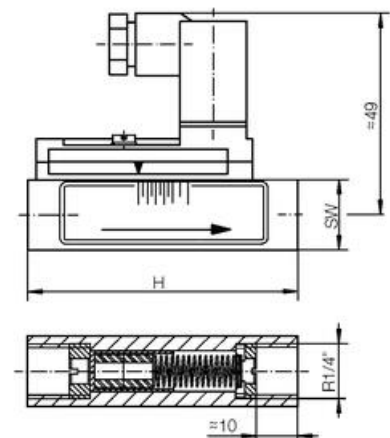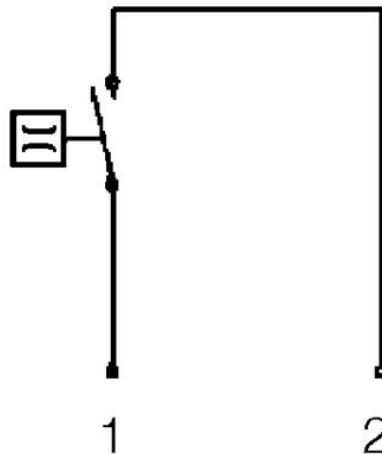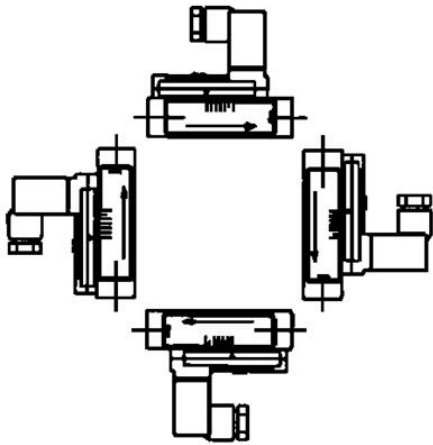

G"	Type	H mm	L mm	SW mm	Weight kg
1/4	RVM-008GM	65	49	17	0,14
1/4	RVM-008GK	65	49	18	0,15